

SAMSUNG Machine Tools

PL25 / 25MC CNC TURNING CENTER



SAMSUNG'S Advanced Engineering and Machine Design

- *Cast iron structure for superior dampening characteristics and thermal displacement*
- *Rigid 45 degree slant bed design for heavy-duty machining*
- *Torque tube design to minimize bending and twisting*
- *Integrated box ways for long-term rigidity and heavy-duty machining*




PL 25
PL 25MC / 500
PL 25MC / 1000



SAMSUNG Machine Tools

PL25/25MC is a heavy duty, ultra precision Turning Center, combined with Samsung's advanced technological features.

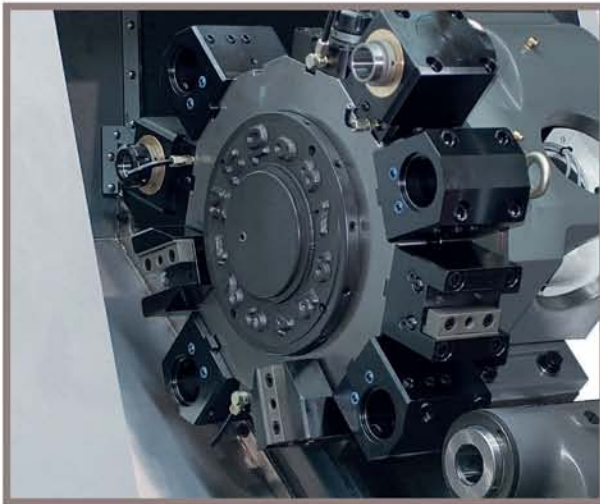

Spindle Speed

3,500 rpm

Spindle Motor(30min/cont.)

30/25 hp

Rapid travel(X/Z)

709/945 ipm

Feed Motor(X/Z)

4/4 hp

■ Highly Reliable and Rigid Structural Design

- One piece Meehanite casting with heavily ribbed torque tube design
- Rigid bed supports for powerful cutting
- Excellent vibration dampening and thermal displacement design

Max. Turning Diameter


13.8 inch (PL25)

18.9 inch (PL25MC)


Max. Turning Length

24.6 inch (PL25)

44.3 inch (PL25MC/1000)

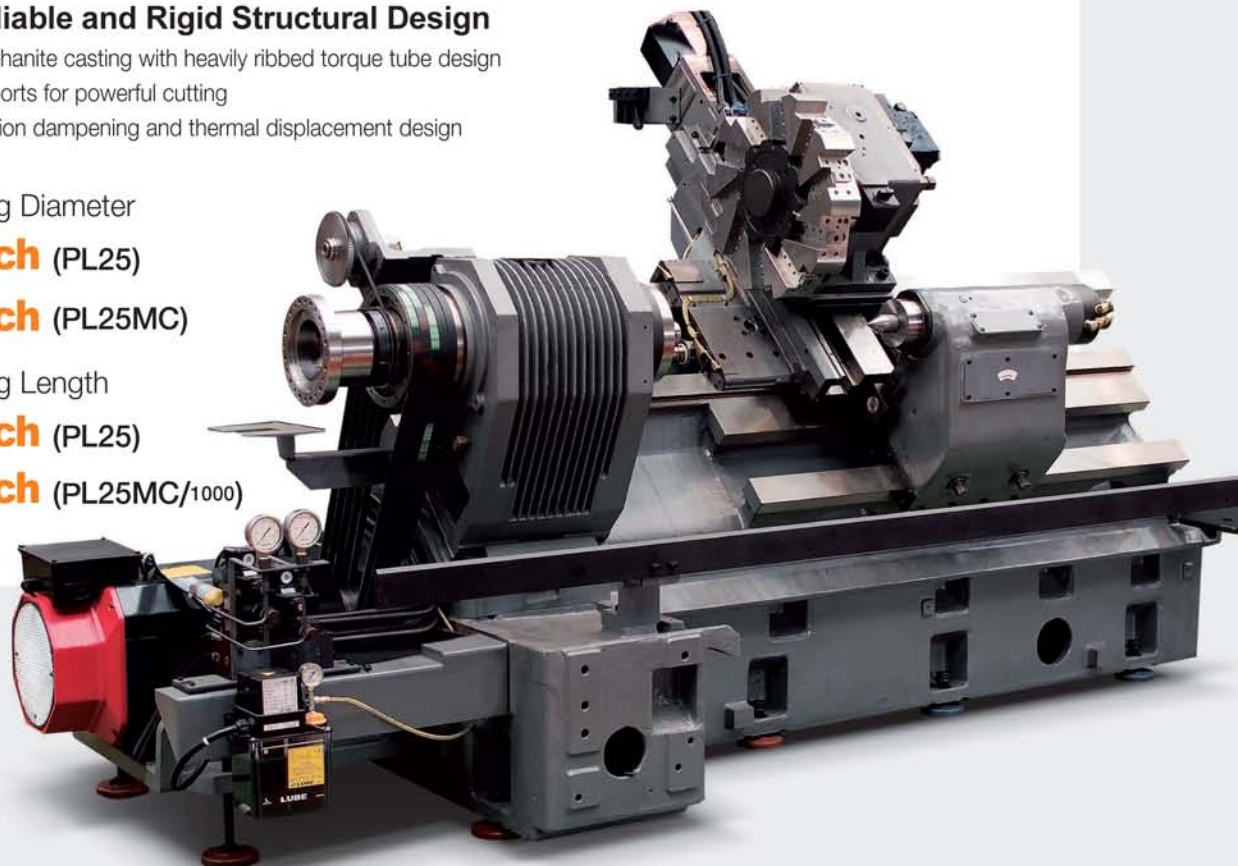

High Accuracy, High Rigidity Spindle

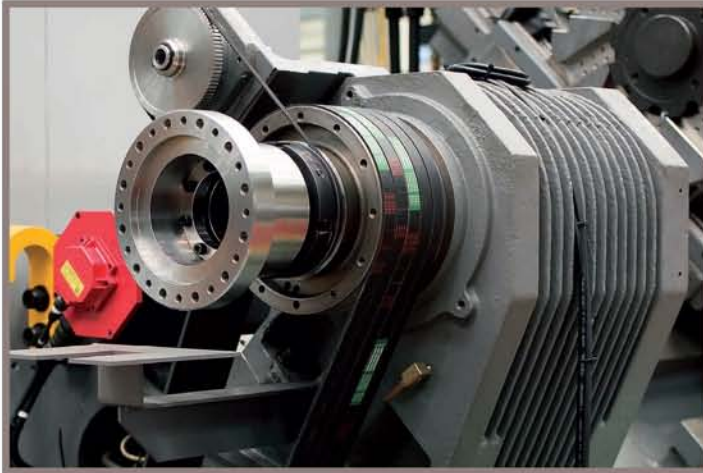


■ Pin Tube Rib Design for Minimal Axis Heat Transfer

Radiator fan-like pin tube rib design dissipates heat generated by axis movements, maintaining minimal thermal expansion.

■ SPINDLE & HEADSTOCK



The Spindle and Headstock are machined and ground in temperature controlled environment and assembled in a clean room.

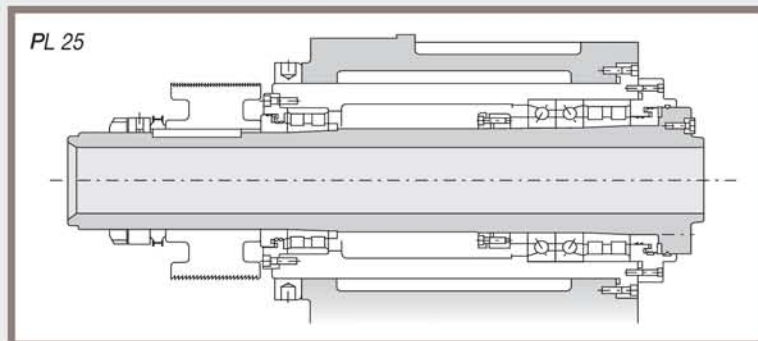

Precision double row cylindrical roller bearings and angular contact ball bearings are located at the front of the spindle, and a double row of cylindrical roller bearings is located in the rear to ensure heavy cutting capabilities with precision.

■ Spindle Power & Torque Diagram

Unit : inch

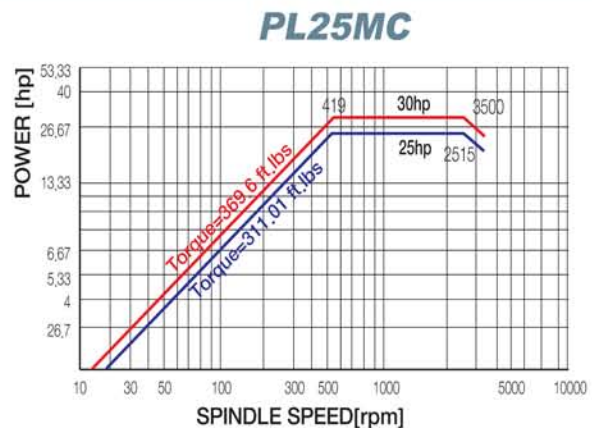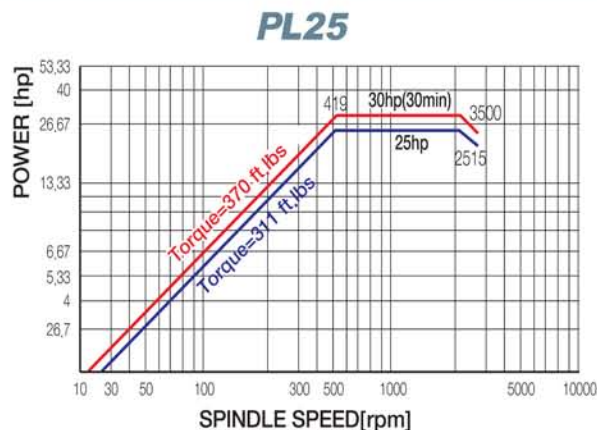


SAMSUNG Machine Tools PL25/25MC

CNC TURNING CENTER

Machine Structure

■ Rigid Turret Design

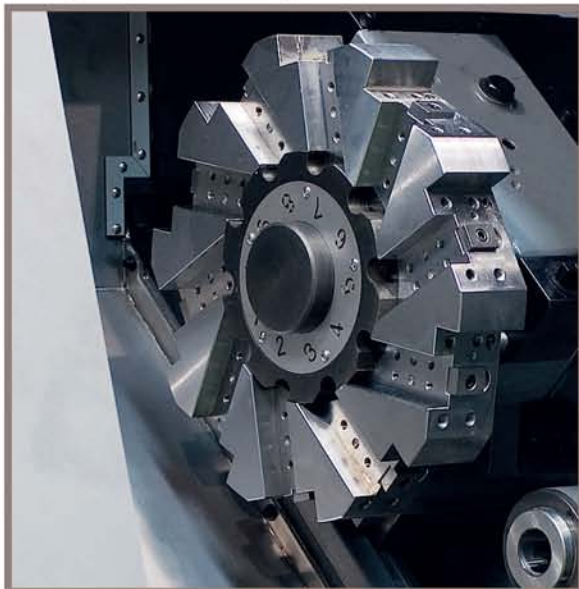

Indexing time

0.25 sec.

Number of tool positions


10 stations

■ High Speed, Heavy Duty Hyd. Index Turret

Driven by a high torque hydraulic index motor, the 10-station heavy-duty turret can accept tools on both left and right side of each station. Turret indexing (repeatability $\pm 0.0002''$) is non-stop, bi-directional with a fast 0.25 second next station index time. A large diameter ($\varnothing 8.27''$) Curvic coupling with 6,404 lbs clamping force enables precision as well as heavy-duty cutting.



■ PL25MC (High Speed Servo Turret)

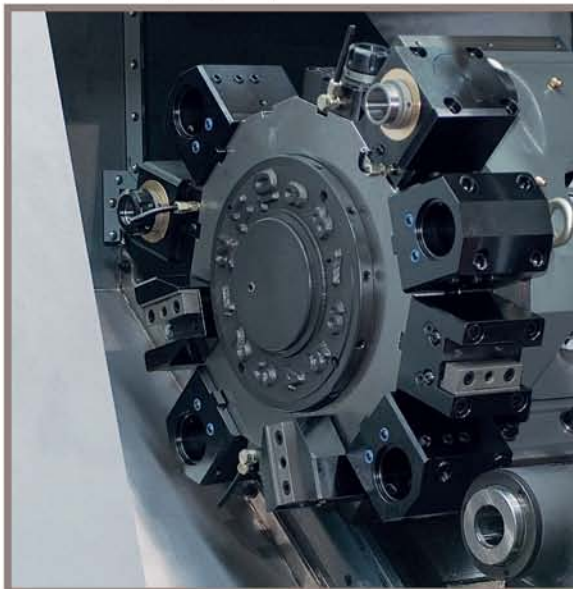

Indexing time

0.2 sec.


Number of tool positions

12 stations

■ BMT Milling Turret (M Type)

PL25MC is equipped with standard 12-station BMT turret capable of accepting rotary tools at any station, providing flexible machining thru various machining operations in just one set-up. Each BMT holder is securely tightened by 4 screws, allowing the turret to perform heavy-duty cutting, milling and drilling operations. Turret indexing is non-stop, bi-directional with a fast 0.2 second next station index time.

■ Turret Torque Diagram

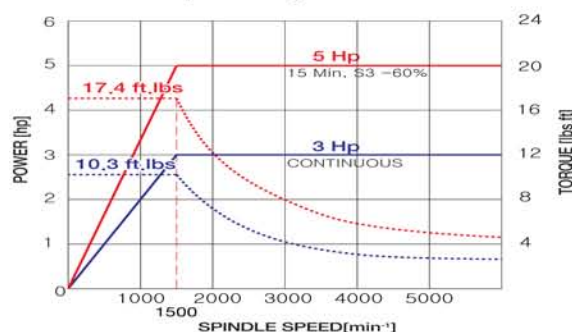


Machine Structure

■ Rigid 45 degree Slant Bed


45 degree slant torque tube design bed and wide guide slide way ensure long term rigidity and machining accuracy.

Featuring superior workability and chip-discharging capability, the bed is designed in a single tube structure boasting strong durability even in heavy-duty cutting.




■ Swivel Operation Panel

Swivel operation panel of 8.4 inch color TFT LCD monitor can turn to 90 degree, providing operators with easy access to the control panel while working on the machine.

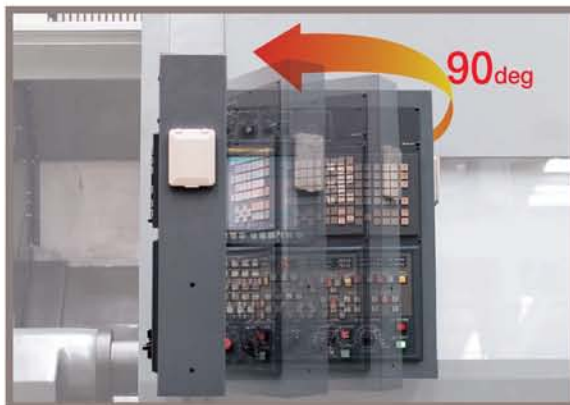

■ Programmable Tailstock (carriage direct-coupled)

The programmable tailstock body mounted is on wide guide ways to ensure rigid work piece support.

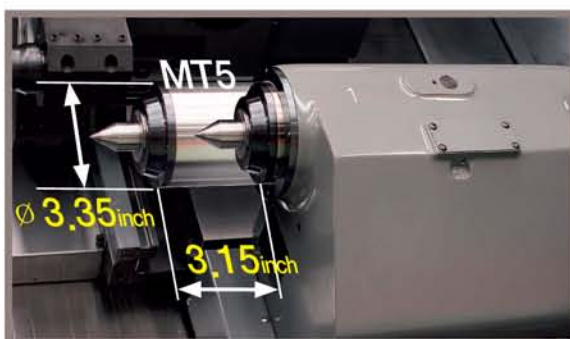

■ Pre-tensioned and Double Anchored Ballscrews

All axes ballscrews are pre-tensioned, heat treated, and fixed by double anchors on both ends, providing ultimate rigidity and minimal thermal growth.



■ Hexahedral Slide Way Frame

Wide integral way is machined from the casting, induction hardened and precision ground to ensure long-term rigidity and machining accuracy and heavy-duty machining.



SAMSUNG Machine Tools PL25/25MC

CNC TURNING CENTER

High Precision


Surface Roughness <O.D. cutting>



Machine type	SL25
Tool	Diamond tool (nose radius 0.020 inch)
Material	AL150 (Aluminum)

Cutting speed	745.6 fpm
Feedrate	0.0020 ipr
Depth of cut	0.004inch
Outer diameter	7.9inch

Roundness




0.37 μm (actual result)

Machine type	PL25
Tool	Diamond tool (nose radius 0.020 inch)
Material	AL150 (Aluminum)
Cutting speed	745.6 fpm
Feedrate	0.0020 ipr
Depth of cut	0.004inch
Outer diameter	7.9inch
Filter	1-50

Processing Speed

Turning Performance (material:SM45C) PL25

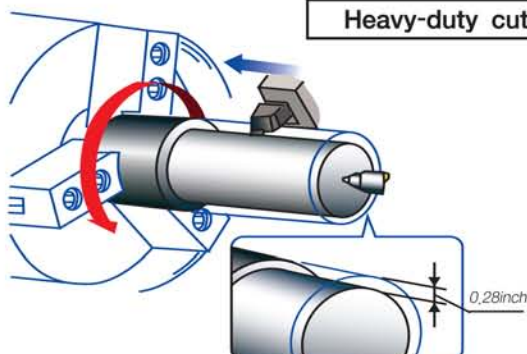

Heavy-duty cutting (O.D) <1 $\frac{1}{4}$ inch $\times$ 1 $\frac{1}{4}$ inch qualified tool>

Spindle speed

890 rpm

Cutting speed

140 m/min (459 fpm)

Depth of cut

0.28 inch <Spindle Load 50%>

Feedrate

0.3 mm/rev (0.08 ipr)

Standard Accessories



Tool Presetter




Automatic Lubricator



Programmable Tailstock


Optional Accessories

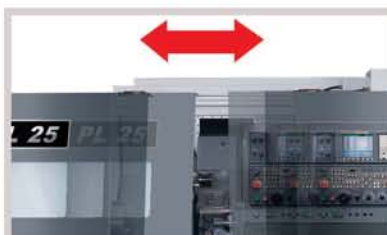

Auto Door





Chip Conveyor

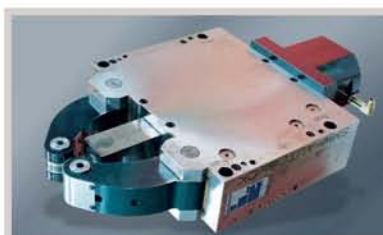


Steady Rest

Tooling System

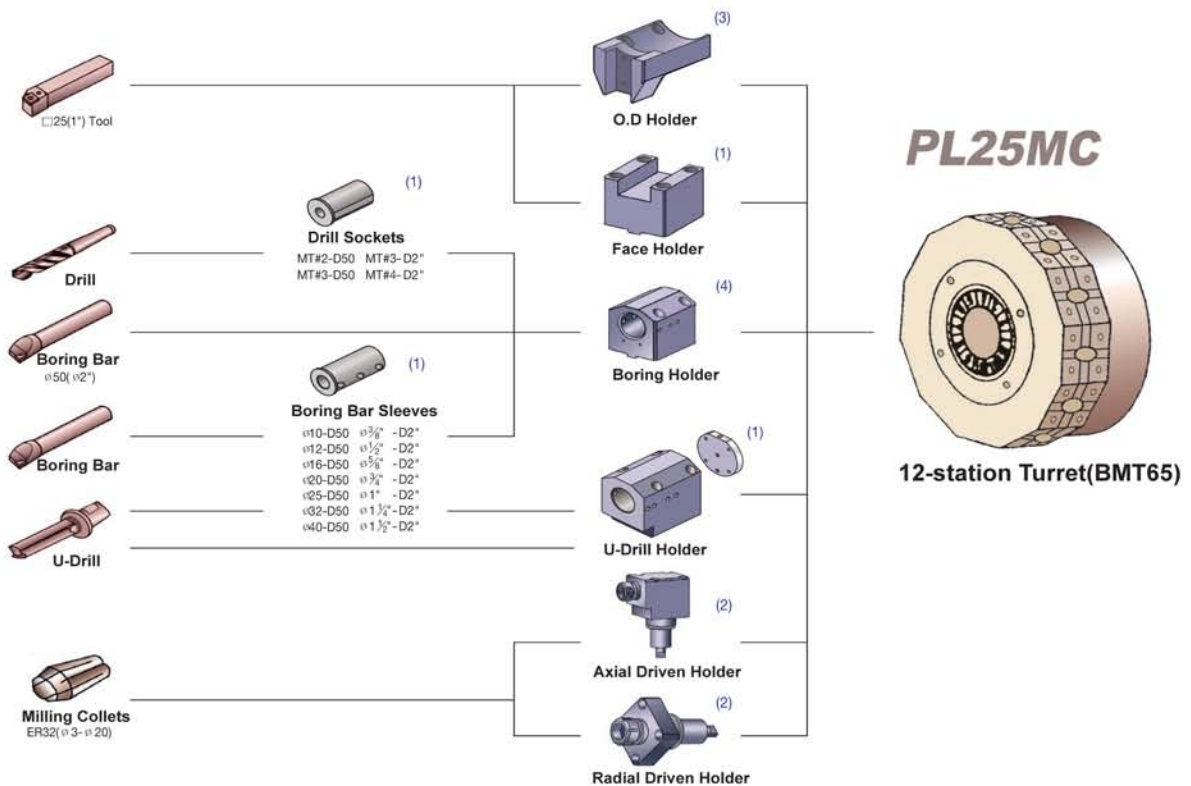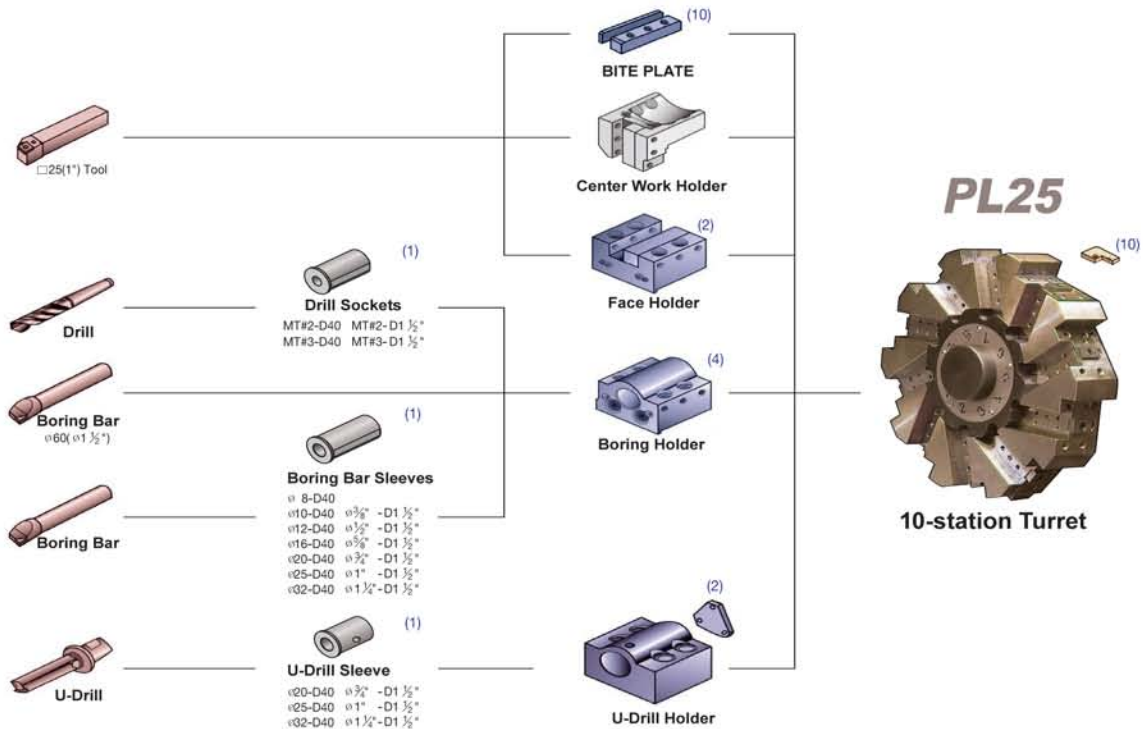


■ Machine Dimensions

Unit : inch

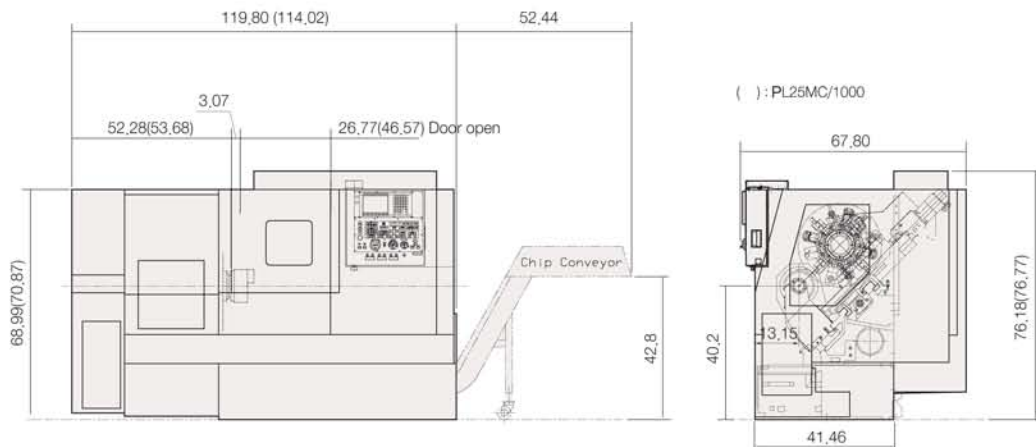


■ Turret Head Interference

Unit : inch

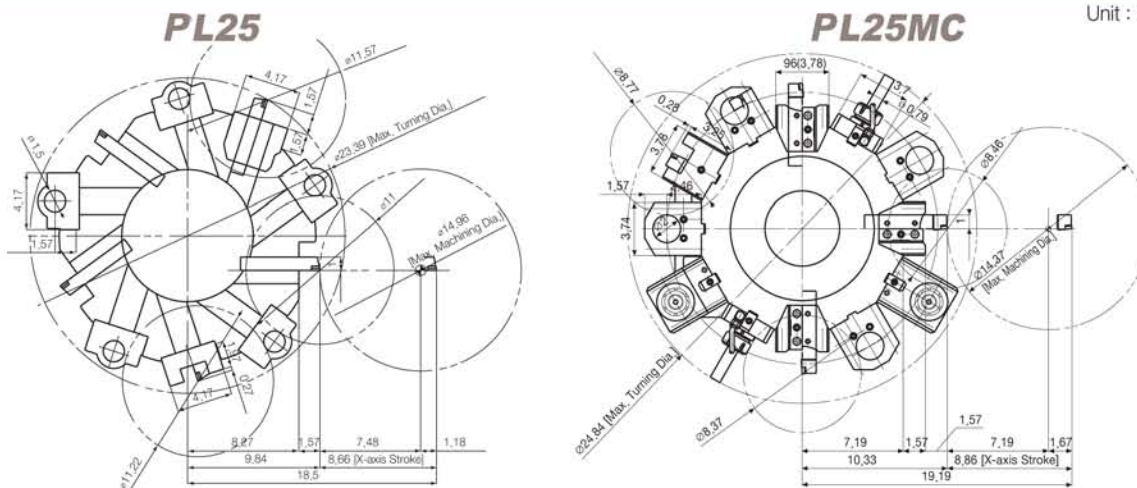

■ Work Range

Unit : inch

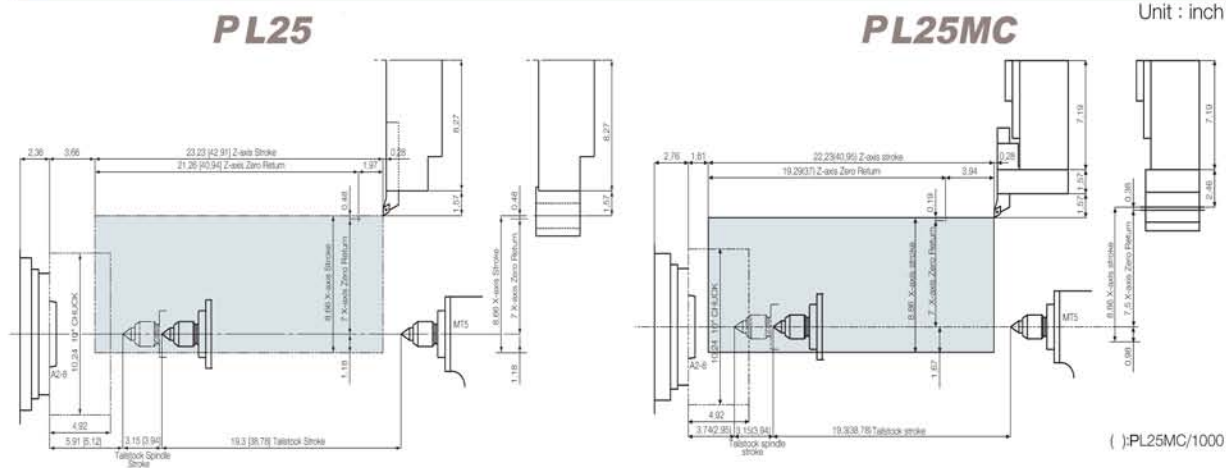

Major Specifications

DESCRIPTION			PL25	PL25MC/500	PL25MC/1000
CAPACITY	Swing over the bed	inch	ø 20,5	ø 25,6	
	Swing over the cross slide	inch	13,8	18,9	
	Distance between centers	inch	24,6		44,3
	Max. machining diameter	inch	ø 15,0	ø 13,8	
	Max. machining length	inch	20,9	20,5	40,2
MAIN SPINDLE	Chuck size	inch	10	10	
	Speed	rpm	3,500	3,500	
	Spindle nose	ASA	A2-8		
	Bore diameter	inch	ø 3,39		
	Draw tube I.D.	inch	3,03		
	Motor(30min/cont.)	hp	30 / 25		
TRAVEL	X/Z/Y axis travel	inch	8,66 / 23,2	8,9 / 21,3	8,9 / 40,9
	X/Z/Y rapid traverse rate	ipm	709 / 945		
	X/Z/Y feed motor	hp	4 / 4		
TURRET	Number of tool positions	st.	12		
	Indexing time	sec	0,25	0,2	
	Shank size for square tool	inch	□1		
	Shank diameter for boring bar	inch	ø1 ½	ø 2	
	Live tool type		-	BMT65	
	Live tool speed	rpm	-	5,000	
	Milling motor (option)	hp	-	5 / 3 (7,5 / 5)	
TAILSTOCK	Tailstock quill travel	inch	3,15		3,94
	Tailstock quill diameter	inch	3,35		4,33
ELECTRIC POWER SUPPLY		kVA/V	30 / 220	45 / 220	
REQUIRED FLOOR SPACE		inch	121 × 64	119 × 68	144 × 68
MACHINE WEIGHT		lbs	11,000	11,600	14,400
CONTROLLER			Fanuc Oi-TC		

- Figures in inches are converted from metric measurements.
- Design and specifications subject to change without notice.

Standard Accessories

- COOLANT SYSTEM
- BUILT-IN WORK LIGHT
- SPLASH GUARD
- HAND TOOLS
- TOOL HOLDER
- 10 " HYDRAULIC CHUCK
- TOOL PRESETTER
- SOFT JAWS 3 SETS
- LEVELING BLOCK
- PROGRAMMABLE TAILSTOCK

Optional Accessories

- HARD JAWS 1 SET
- CHIP CONVEYOR
- PARTS CATCHER
- AUTO DOOR
- AIR BLOW UNIT
- AUTO MEASURING SYSTEM

■ NC Unit Specifications / FANUC 0i-TC

	Item	Specification
Controls	Simultaneous controllable axes	X, Z axes
	Least command increment	0.001 mm (0.000039")
	Least input increment	0.001 mm (0.000039")
Feed functions	Feedrate override	0 ~ 150% (10 % unit)
	Dwell	G04
	Zero return	G27, G28, G30
	Pulse handle feed	x1, x10, x100
	Rapid traverse rate override	F0, 25%, 50%, 100%
	Feedrate per minute	G98
	Feedrate per revolution	G99
	3rd and 4th reference return Feed forward function	
Tool functions	Tool number command	T4 - digit
	Tool nose radius compensation	G40 - G42
	Number of tool offsets	16 pairs
	Tool geometry/wear offset	Geometry & wear data
	Tool life management Tool path graphic display	
Programming functions	Absolute/ incremental programming	X, Z & U, W
	Constant surface speed control	G96, G97
	Multiple repetitive canned cycle	G70 - G76
	Simple canned cycle	G90, G92, G94
	Decimal point input	Decimal point value
	Inch/metric conversion	G20, G21
	Circular interpolation by radius programming	Radius R instead of I, K
	Chamfering & corner R programming	Chamfer & corner R can be machined
	Sub program call	4 Nested holes
	Thread cutting cycle retract	Thread cutting is temp. stop, return to start point
	Work coordinate system selection	G54 - G59
	Local/ machine coordinate system	G52, G53
	Maximum programmable dimension	±99999.999mm (9999.9999")
	M function	M3 digit
	User macros	
	Variable lead thread cutting	
	Continuous thread cutting	
	Drilling canned cycle (G80 series)	
	Line/ angle (direct dimension) programming	
	Three G code system (selectable)	
Tape functions	Input code	ISO, EIA
	I/O interface	RS-232C
	Part program storage length	640m
	Number of stored programs	400EA
Other functions	Search function	Sequence, program, address search
	MDI / CRT unit	8.4" TFT LCD
	Stored stroke check 1	Overtravel control
	Background editing	Program editing during automatic operation
	Help function	Alarm & operation display
	Running time / Parts number display	Automatic running time & parts number display
	Load meter display	Spindle load display
	Self diagnostic function	Self-design Test
	Expanded program editing	Copy, move, change of NC program
	Stored stroke 2 and 3	
	Spindle orientation	

